

LOCTITE® EA E-30HV

July 2023

PRODUCT DESCRIPTION

LOCTITE® EA E-30HV provides the following product characteristics:

Technology	Epoxy
Chemical type	Epoxy
Appearance (resin)	Off white
Appearance (hardener)	Off white
Appearance (mixed)	Off white
Components	Two components – requires mixing
Viscosity	High thixotropic
Mix ratio, (by volume) Resin : Hardener	2 : 1
Mix Ratio, (by weight) Resin : Hardener	100 : 50
Cure	Room temperature cure after mixing
Application	Bonding, Potting

LOCTITE® EA E-30HV is a two-component high viscosity, industrial grade epoxy adhesive. Once mixed, the two-part epoxy system develops fast fixture strength and cures within 24 hrs. with minimal shrinkage. When fully cured, the epoxy withstands exposure to a wide range of chemicals and solvents and has excellent dimensional stability over a wide temperature range. It bonds well to most materials including glass, optical fibers, ceramics, metals, and many rigid plastics. LOCTITE® EA E-30HV has good balance of flow characteristics and thixotropic behavior at low shear that ensures applications in vertical and horizontal surfaces with 1-2 mm gap filling and partially non sagging properties. Typical applications include general purpose bonding, potting, or encapsulating.

TYPICAL PROPERTIES OF UNCURED MATERIAL

Resin

Specific gravity @ 23°C	1.73
Viscosity, Brookfield – CAP 2000+ @25°C, mPa.s (cP):	33,000
Spindle 5, speed 10 rpm	

Hardener

Specific gravity @ 23°C	1.61
Viscosity, Brookfield – CAP 2000+ @25°C, mPa.s (cP):	75,000
Spindle 5, speed 10 rpm	

Mixed

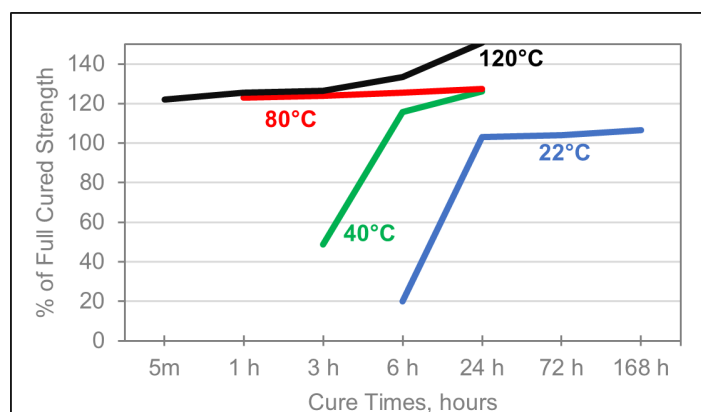
Specific gravity @ 23°C	1.62
Viscosity, Brookfield - RVT, 25 °C, mPa.s (cP):	51,000
Spindle 5, speed 5 rpm	

TYPICAL CURING PERFORMANCE

Gel time (100 gm mixed) @23°C, minutes	26
--	----

Cure speed vs. time

The rate of cure will depend on the ambient temperature. The graph below shows the shear strength developed with time @23°C on grit blasted steel lap shears at different temperatures and tested according to ASTM D 1002.



TYPICAL PERFORMANCE OF CURED MATERIAL

Cured for 5 days @ 23°C

Physical properties

Glass Transition Temperature (Tg), °C		64
TMA, ISO 11359-2		
Shore Hardness, ASTM D 2240, Durometer D		80
Compressive Strength, ASTM D 695	N/mm ² (psi)	44 (6,380)
Compressive Modulus, ASTM D 695	N/mm ² (psi)	980 (142,000)

Adhesive properties

Lap Shear Strength, ASTM D 1002

Mild steel (grit blasted)	N/mm ² (psi)	21 (3,000)
Aluminum (Anodized)	N/mm ² (psi)	11 (1,600)
Stainless steel	N/mm ² (psi)	3.5 (500)
Polycarbonate	N/mm ² (psi)	1.8 (260)

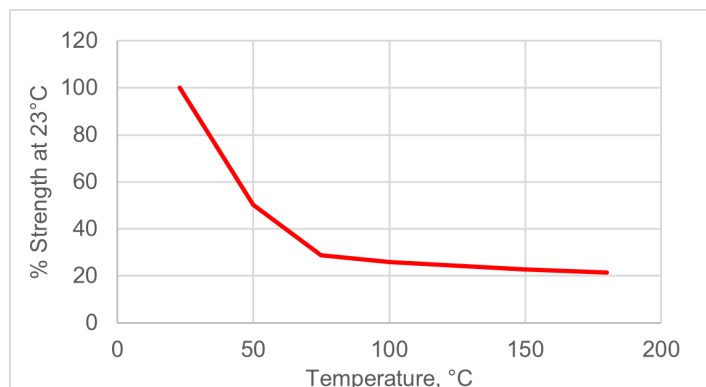
TYPICAL ENVIRONMENTAL RESISTANCE

Cured for 5 days @ 23°C

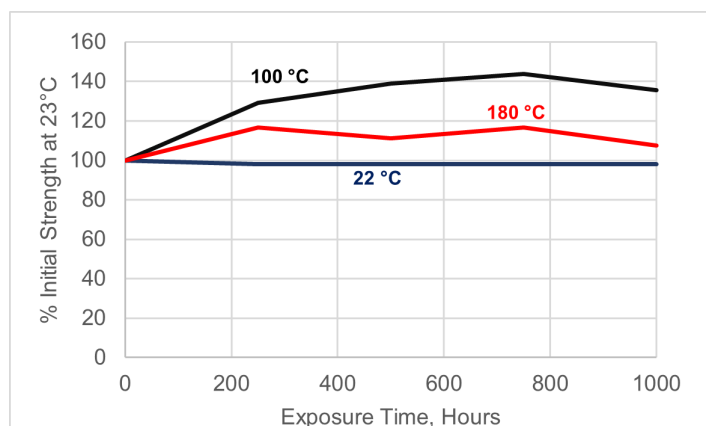
Lap Shear Strength, ASTM D 1002, Mild Steel (Grit Blasted)

Hot strength

Tested at temperature

**Heat aging**

Aged at temperature indicated and tested @ 23 °C.

**GENERAL INFORMATION**

This product is not recommended for use in pure oxygen and/or oxygen rich systems and should not be selected as a sealant for chlorine or other strong oxidizing materials.

For safe handling information on this product, consult the Safety Data Sheet (SDS).

Directions for use

1. For high strength structural bonds, remove surface contaminants such as paint, oxide films, oils, dust, mold release agents and all other surface contaminants.
2. Use gloves to minimize skin contact. DO NOT use solvents for cleaning hands.
3. **Hand Mixing:** Combine Part A & Part B in the correct ratio and mix thoroughly. Be sure to scrape both the sides and bottom of mixing container. Mix for approximately 2 to 5 minutes to get the uniform color. Heat build-up during or after mixing is normal.
4. For maximum bond strength apply adhesive evenly to both surfaces to be joined.
5. Application to the substrates should be made within 26 minutes. Larger quantities and/or higher temperatures will reduce this working time.
6. Join the adhesive coated surfaces and allow to cure. Higher temperatures will speed up curing.
7. Keep assembled parts from moving during cure. The bond should be allowed to develop full strength before subjecting to any service load.
8. Excessive uncured adhesive can be cleaned up with ketone type solvents.

Storage

Store product in the unopened container in a dry location. Storage information may be indicated on the product container labeling.

Optimal Storage: 8°C to 21°C. Storage below 8°C or greater than 28°C can adversely affect product properties.

Material removed from containers may be contaminated during use. Do not return product to the original container. Henkel Corporation cannot assume responsibility for product which has been contaminated or stored under conditions other than those previously indicated. If additional information is required, please contact your local Henkel representative.

Product Specification

The technical data contained herein are intended as reference only and are not considered specifications for the product. Product specifications are located on the Certificate of Analysis or please contact Henkel representative.

Approval and Certificate

Please contact Henkel representative for related approval or certificate of this product.

Data Ranges

The data contained herein may be reported as a typical value. Values are based on actual test data and are verified on a periodic basis.

Temperature/Humidity Ranges: 23°C / 50% RH = 23±2°C / 50±5% RH



Conversions

$(^{\circ}\text{C} \times 1.8) + 32 = ^{\circ}\text{F}$
 $\text{kV/mm} \times 25.4 = \text{V/mil}$
 $\text{mm} / 25.4 = \text{inches}$
 $\mu\text{m} / 25.4 = \text{mil}$
 $\text{N} \times 0.225 = \text{lb}$
 $\text{N/mm} \times 5.71 = \text{lb/in}$
 $\text{N/mm}^2 \times 145 = \text{psi}$
 $\text{MPa} \times 145 = \text{psi}$
 $\text{N}\cdot\text{m} \times 8.851 = \text{lb}\cdot\text{in}$
 $\text{N}\cdot\text{m} \times 0.738 = \text{lb}\cdot\text{ft}$
 $\text{N}\cdot\text{mm} \times 0.142 = \text{oz}\cdot\text{in}$
 $\text{mPa}\cdot\text{s} = \text{cP}$

Trademark usage

Except as otherwise noted, all trademarks in this document are trademarks of Henkel Corporation in the U.S. and elsewhere. ® denotes a trademark registered in the U.S. Patent and Trademark Office."

Disclaimer

The information provided in this Technical data sheet (TDS) including the recommendations for use and application of the product are based on our knowledge and experience of the product as at the date of this TDS. The product can have a variety of different applications as well as differing application and working conditions in your environment that are beyond our control. Henkel is, therefore, not liable for the suitability of our product for the production processes and conditions in respect of which you use them, as well as the intended applications and results. We strongly recommend that you carry out your own prior trials to confirm such suitability of our product. Any liability in respect of the information in the Technical data sheet or any other written or oral recommendation(s) regarding the concerned product is excluded, except if otherwise explicitly agreed and except in relation to death or personal injury caused by our negligence and any liability under any applicable mandatory product liability law.

In case products are delivered by Henkel Colombiana, S.A.S. the following disclaimer is applicable:

The information provided in this Technical Data Sheet (TDS) including the recommendations for use and application of the product are based on our knowledge and experience of the product as at the date of this TDS. Henkel is, therefore, not liable for the suitability of our product for the production processes and conditions in respect of which you use them, as well as the intended applications and results. We strongly recommend that you carry out your own prior trials to confirm such suitability of our product. Any liability in respect of the information in the Technical Data Sheet or any other written or oral recommendation(s) regarding the concerned product is excluded, except if otherwise explicitly agreed and except in relation to death or personal injury caused by our negligence and any liability under any applicable mandatory product liability law.

In case products are delivered by Henkel Corporation, or Henkel Canada Corporation, the following disclaimer is applicable:

The data contained herein are furnished for information only and are believed to be reliable. We cannot assume responsibility for the results obtained by others over whose methods we have no control. It is the user's responsibility to determine suitability for the user's purpose of any production methods mentioned herein and to adopt such precautions as may be advisable for the protection of property and of persons against any hazards that may be involved in the handling and use thereof. In light of the foregoing, **Henkel Corporation specifically disclaims all warranties expressed or implied, including warranties of merchantability or fitness for a particular purpose, arising from sale or use of Henkel Corporation's products. Henkel Corporation specifically disclaims any liability for consequential or incidental damages of any kind, including lost profits.** The discussion herein of various processes or compositions is not to be interpreted as representation that they are free from domination of patents owned by others or as a license under any Henkel Corporation patents that may cover such processes or compositions. We recommend that each prospective user test his proposed application before repetitive use, using this data as a guide. This product may be covered by one or more United States or foreign patents or patent applications.